


SERIE HS

NB: Le caratteristiche tecniche dei modelli con potenza superiore vengono fornite su richiesta. Le caratteristiche generali possono essere variate e quindi non sono impegnative.

Technical specifications of models with higher power are supplied on request. The specifications can be changed and are not binding.

Las características técnicas de los modelos superiores se facilitan bajo petición. Las características generales pueden ser variadas y por lo tanto no son vinculantes.

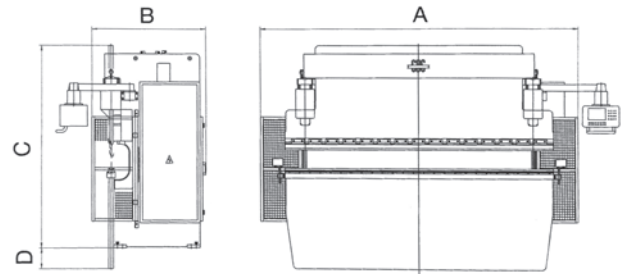

Modello	Forza di lavoro Working pressure Fuerza del trabajo kN	Luce effettive Working length Luz útil mm	Distanza tra i montanti Width between uprights Distancias entre los montantes mm	Profondità incavo Gap Entalladura mm	Corsa del pestone Piston stroke Carrera mm	Distanza banco/portalamina Max die space stroke/ajuste u. p. Distancia banco/portalamientas mm	Velocità - Speed - Velocidad			Potenza motore Motor power Potencia motor kW	A mm	B mm	C mm	D mm
							Discesa Approachment Bajada mm/s	Lavoro Working Trabajo mm/s	Ritorno Return Retorno mm/s					
40/12,5 40/16 40/21 40/26	400	1250 1600 2100 2600	1000 1100 1600 2100	205	150 200	350 400	200	10	200	4	1780 2130 2630 3130	1420	2340	---
60/21 60/26 60/31	600	2100 2600 3100	1600 2100 2600	300	150 200	350 400	200	10	200	5,5	2600 3100 3600	1300	2350	---
90/21 90/26 90/31 90/41	900	2100 2600 3100 4100	1750 2100 2600 3600	500	200 400	400 600	200	10	190	9	2600 3100 3600 4600	1480	2700	---
130/31 130/41 130/51 130/61 130/81	1300	3100 4100 5100 6100 8100	2600 3600 4100-4600 5100 6100	500	220 400	420 600	200	10	190	11	3600 4600 5600 6600 8600	1700	2900	0-300 300 300
175/31 175/41 175/51 175/61 175/81	1750	3100 4100 5100 6100 8100	2600 3600 4100-4600 5100 6100	500	250 400	450 600	200	10	180	18	3600 4600 5600 6600 8600	1800	3150 3250 3250 3450 3750	---
200/31 200/41 200/51 200/61 200/81	2000	3100 4100 5100 6100 8100	2600 3600 4100-4600 5100 6100	500	250 400	450 600	200	10	180	18	3600 4600 5600 6600 8600	1900	3200 3300 3300 3500 3800	---
250/31 250/41 250/51 250/61 250/81	2500	3100 4100 5100 6100 8100	2600 3600 4100-4600 5100 6100	500	250 400	500 600	180	10	180	18	3650 4650 5650 6650 8650	2180	3300 3400 3400 3800 4000	---
320/31 320/41 320/51 320/61 320/81	3200	3100 4100 5100 6100 8100	2600 3600 4100-4600 5100 6100	500	300 400	550 600	180	10	180	22	3800 4650 5650 6650 8650	2350	3450 3450 3450 3900 4400	---
400/41 400/51 400/61 400/81 400/101	4000	4100 5100 6100 8100 10100	3600 4100-4600 5100 6100 8100	500	300 400	550 600	180	10	180	30	4650 5650 6650 8650 10650	2450	3700 3900 4200 4700 5200	---
500/41 500/51 500/61 500/81 500/101	5000	4100 5100 6100 8100 10100	3600 4100-4600 5100 6100 8100	500	300 400	600 600	150	10	120	30	4650 5650 6650 8650 10650	2600	3700 3900 4200 4800 5200	500 500 500 700 900